


6 - 10 m
Mounting Height

84 - 155W
6000 - 17200 Lm

5 Year Warranty

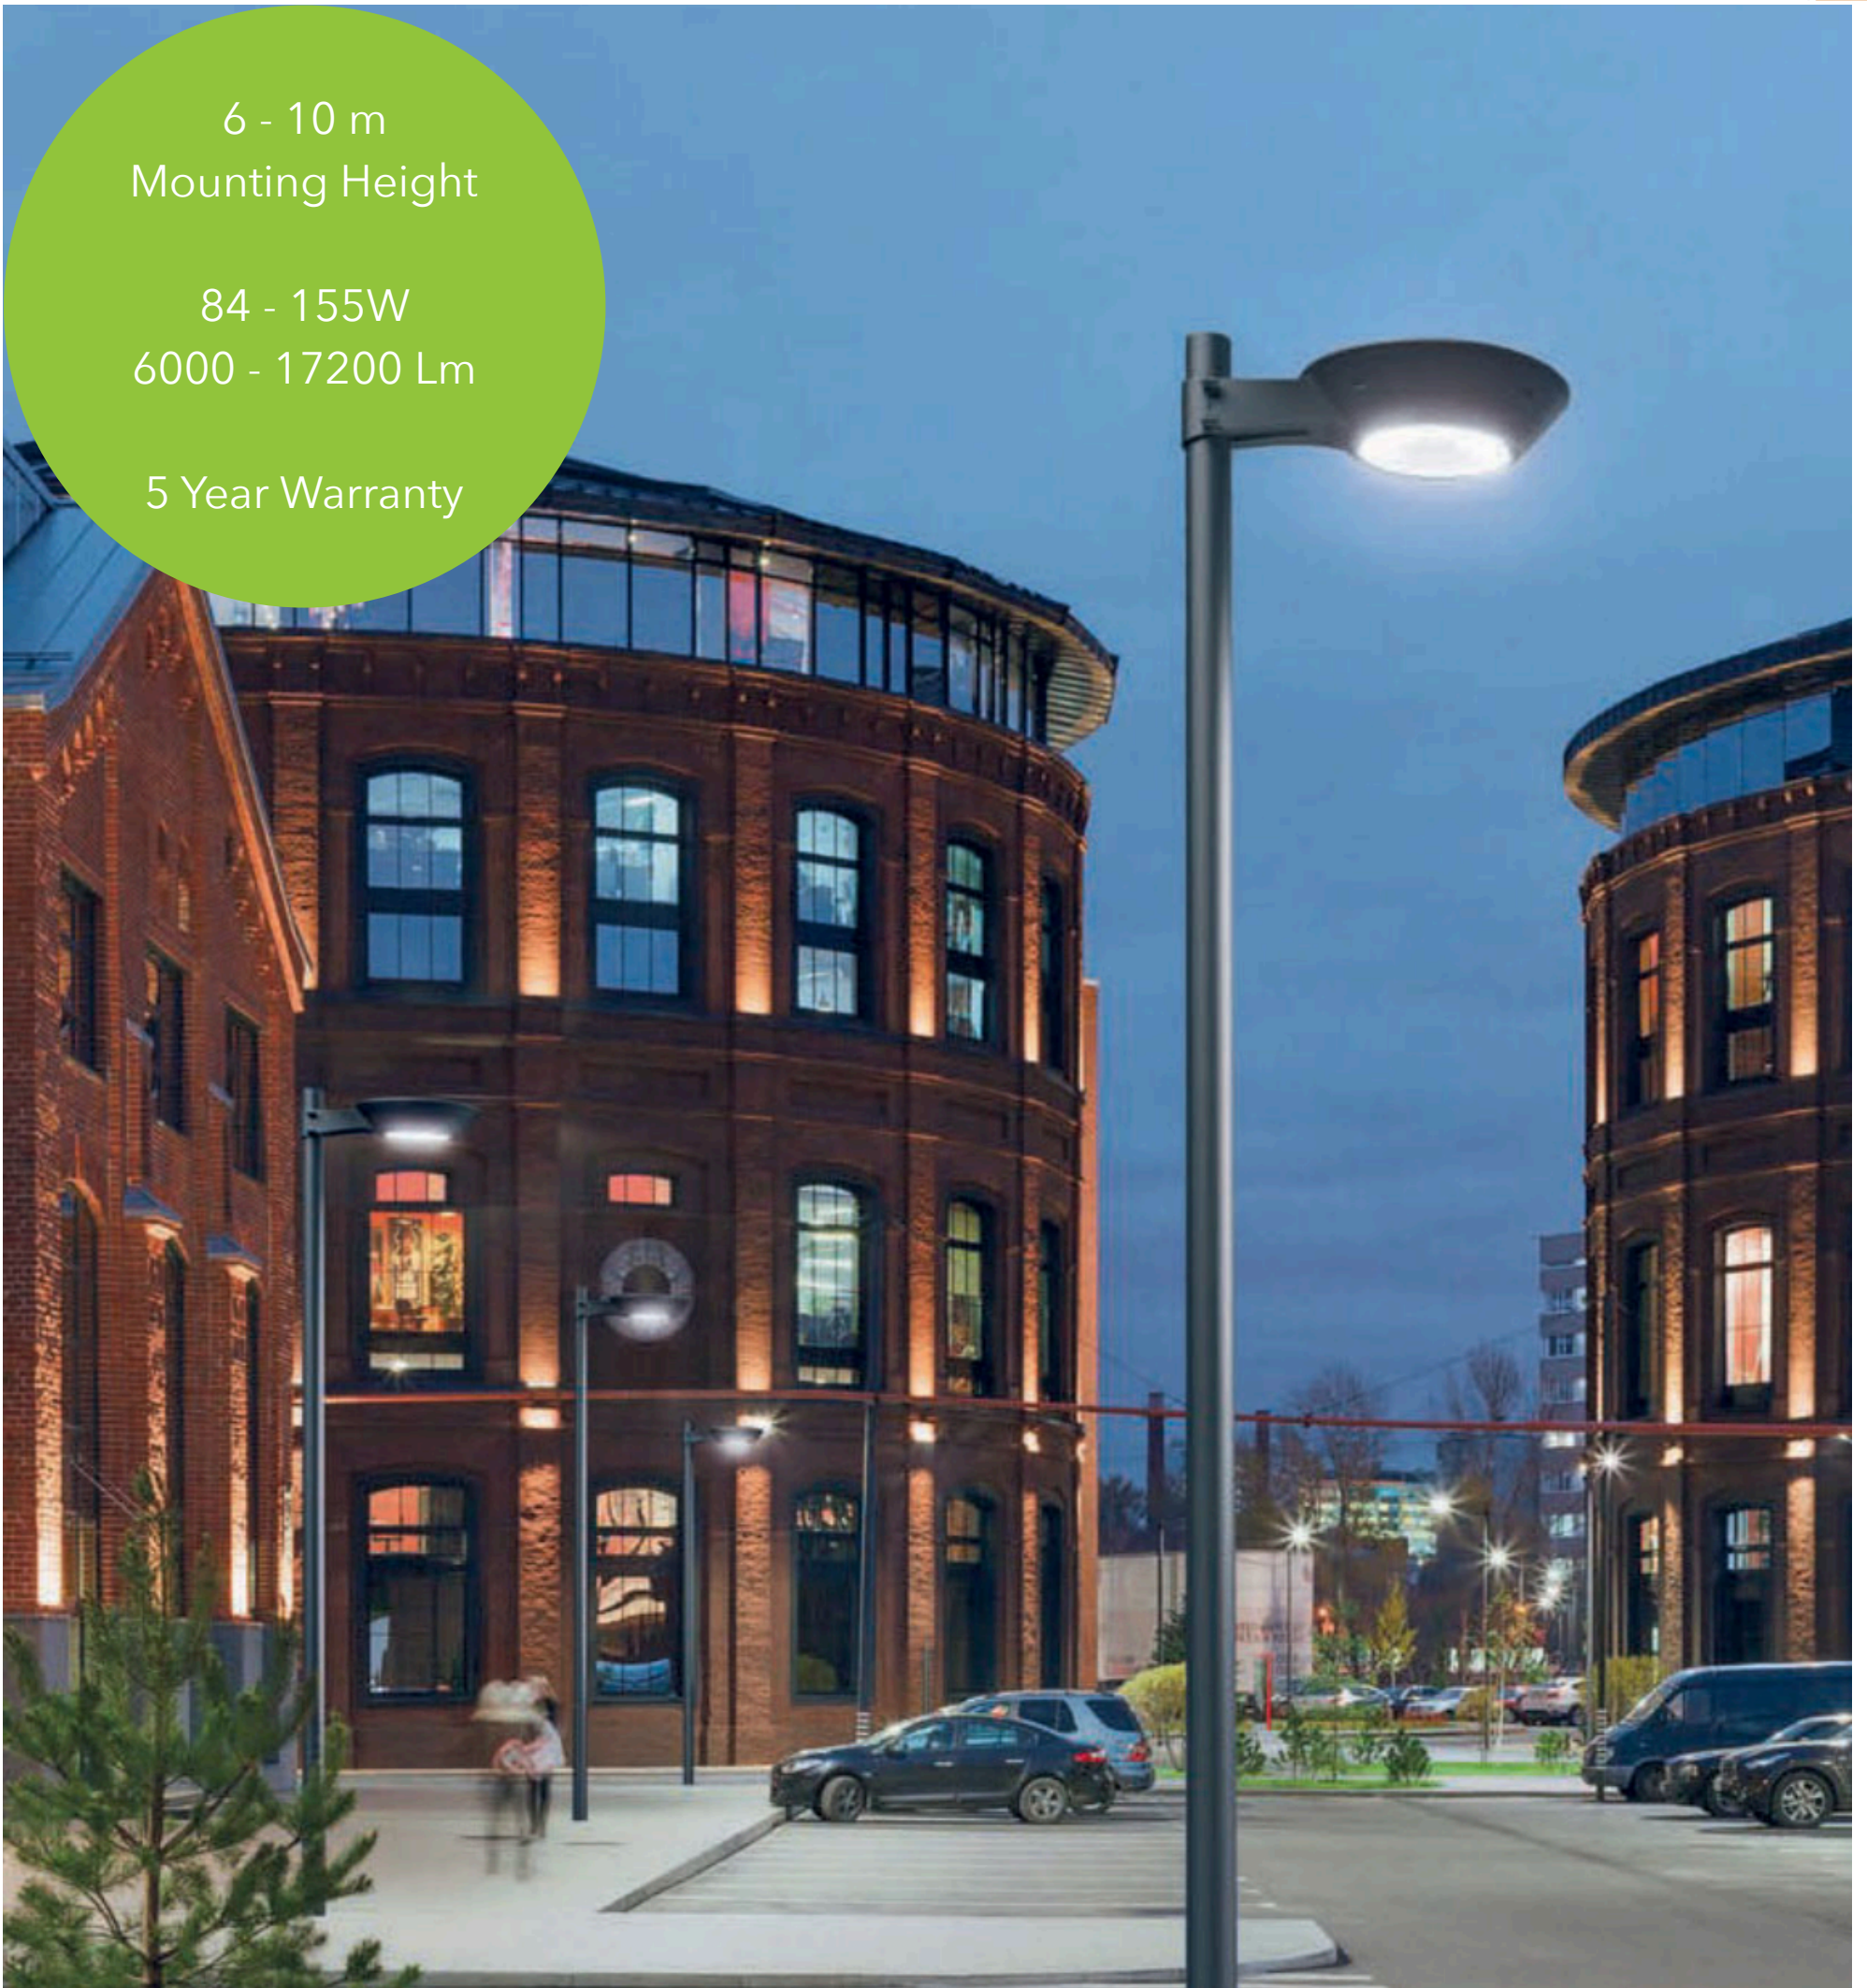

Residential Developments

Business Parks

Parks and Open Spaces

Shopping centres

OSLO
Contemporary Series


 **acrospire**
Products Ltd



Oslo Contemporary Lanterns offer the latest energy saving LED in a cutting edge, contemporary design.

Features

- Housing and frame pressed in die-cast aluminium
- Electric gear on removable tray for easy maintenance.
- Anti-condensation valve for air recirculation
- Complete with quick connection
- Automatic temperature control with automatic resetting
- PMMA optics with high resistance to temperature and UV rays

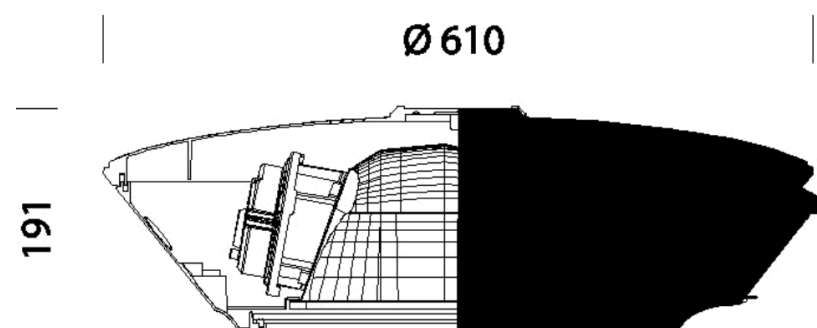

Product Specification

Electrical Class : Class 2

IP Rating : IP66

IK rating: IK09

Lighting

Light Source: LED

CCT: 2700K to 5000K

Colour Rendering: >80

L90: 100,000 Hours (at 25 deg C Tq)

Power and Control

Nominal Voltage: 230V - 50Hz

Surge Protection: 10kV Standard

Driver: Stand alone and remote dimming protocols (DALI)

Mechanical and Installation

Body: Die-cast aluminium

Optics: PMMA

Diffuser: 5mm tempered glass

Finish: Bi-component UV-stabilised acrylic coating

Operating Temp: -20 degs C to +40 degs C

OSLO
Contemporary Series

 **acrospire**
Products Ltd